

“Dotty Light” Slim & High Brightness LED Backlight Signboard

Epochal product ~~ HQ LED Backlight


A4 15000Lux ; A2 8000Lux

Both sides & curved surface ODM will be accepted

Characteristics

- ◇ Low power consumption with High lighting efficiency
- ◇ Special know-how light guide sheet with LED light source
- ◇ Side view LED for slim thickness (A2 only 15mm)
- ◇ Panel lighting with stability & uniformity
- ◇ Delicate regulator for luminance control
- ◇ Patented thermal module for life-time

~~ Photograph / Printed DM can be applied to “Dotty Light” ~~

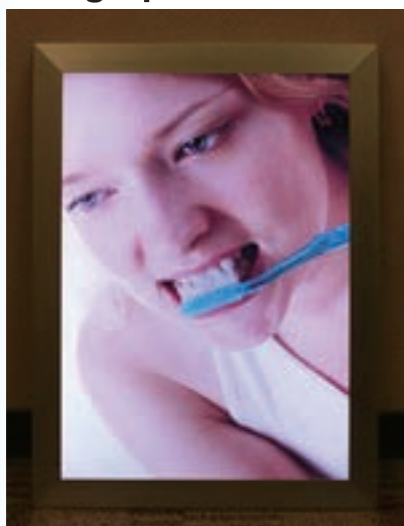

**ASARI DENKI CO.,LTD. TAIWAN
HUMREN INTERNATIONAL CO.,LTD.**



<http://www.asari.co.jp> Tel: +886-3-5825-211 Fax: +886-3-5825-147

Contact: Jimmy Chen by +886-937-015567 / jimmy@hric.com.tw

Miraculous Effect of Thermal Radiation

More Reliable & Longer Usage of IC Circuit

Brighter Effects & Lower Decay

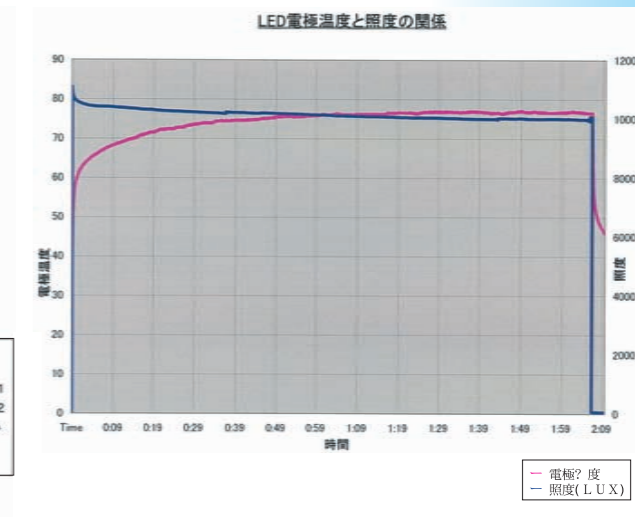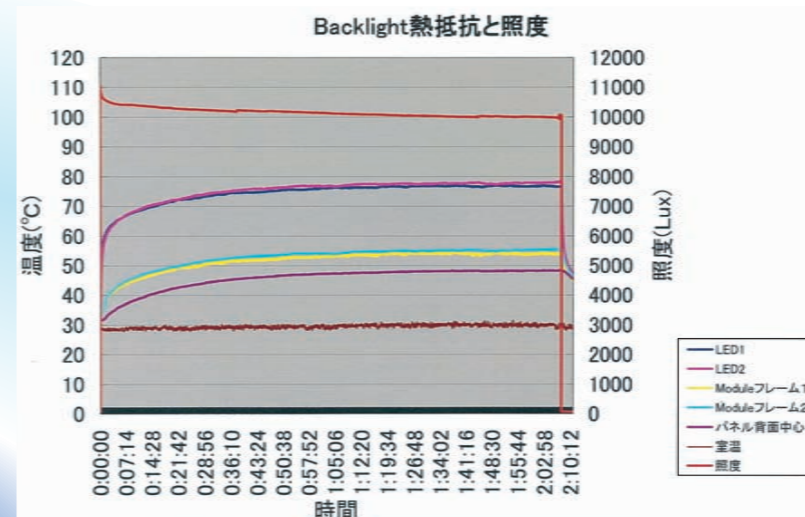

SPEC

Model	DOL-A4	DOL-A2
Input Voltage	DC12V	DC24V
LED Drive	Constant Current	Constant Current
Current	MAX 2A	MAX 2A
Color Temp.	X0.305~0.330 Y0.350~0.390	X0.305~0.330 Y0.350~0.390
Lightness	MAX 15,000 lux. average	MAX 8,000 lux. average
LED	60 Pcs	120 Pcs
View Size	210mm*297mm	420mm*594mm
Panel Size	272mm*359mm*11mm	496mm*670mm*15mm
Weight	1,500g	5,900g

Control Regulator (AC Adapter)

Model	DOL-A4	DOL-A2
I / P	100-240V 50/60Hz	100-240V 50/60Hz
O / P	DC12V/5A	DC24V/2.5A
Size	117W * 60D * 40Hmm	117W * 60D * 40Hmm
Weight	450g	450g

Power Control Regulator

Model	DOL-A4	DOL-A2
Input Vol.	DC12V	DC24V
Input Power	24W	48W
Current Range	0~2A	0~2A
Size	112W * 60D * 22Hmm	112W * 60D * 22Hmm
Weight	170g	170g



The product design and SPEC will vary without notice.