

WA ! LIGHT

LED SPOT LIGHTING

ワ・ライト

Special lens · high lighting efficiency

only 1/3 ~ 1/5 power, brightness 3~7times


Battery driven with high performance !!

高照度



Special lens, Energy-saving


- Stable uniformity & brightness
- HP-LED Thermal renovation




Registered Pattern



100% Waterproof



High Tolerance



Features

- Outdoor/ indoor SPOT lighting. Multipurpose illumination
- Energy saving, low LED heat, long life over 30000hr.
- 100% waterproof and excellent quality, multi application
- Low running cost, high cost returns

ASARI DENKI CO.,LTD.

5-140-12 KACHI OKAYAMA CITY704-8173 JAPAN
TEL 086-943-0711 FAX 086-942-7458
<http://www.asari.co.jp>

ASARI DENKI CO., LTD. TAIWAN
HUMREN INTERNATIONAL CO.,LTD.

TEL:886-3-5825-211 FAX:886-5825-147
<http://www.asari.co.jp> jimmy@hric.com.tw

LED lighting WA LIGHT EX Series SPEC.


【SL-24PEX (DC12V 15W)】
W360*D50*H95 Weight 1.1kg



【SL-MD9PEX (DC12V 6W)】
W140*D45*H130 weight490g (with stand)



【SL-6PEX-OB (DC7.2V 4.5W)】
W110*D40*H175 W: 430g

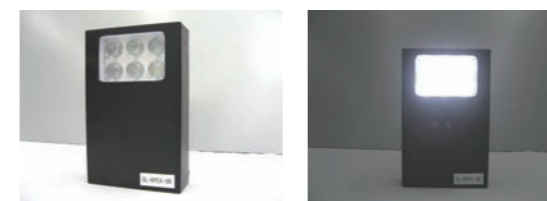

9Ppower BOX
W70*D120*H35
W:170g

【BT】



①12V12Ah W150*D98*H95 4.3kg
②12V2Ah W200*D60*H25 810g
③6V W100*D65*H25 125g

【SL-MD3PEX (DC12V 2W)】
W103*D37*H27 W: 125g



【 SPEC. 】

Model	Voltage	Power	Battery
SL-24PEX	DC 12V	15W	①, ②
SL-MD9PEX	DC 12V	6W	①, ② ③single type
SL-6PEX-OB	DC 7.2V	4.5W	Charger installed
SL-MD3PEX	DC 6V	2W	③

* SL-24PEX & SL-MD9PEX can be applied to adapter with AC100V

【BT6VCharger】



【 Lighting unit:Lux 】

Model		0.5m	1m	2m	3m
SL-24PEX	DC 12V 15W	3400	1440	410	178
SL-MD9PEX	DC 12V 6W	1900	560	150	80
SL-6PEX-OB	DC 7.2V 4.5W	1400	390	100	46
SL-MD3PEX	DC 6V 3W	680	200	52	26

* 0.5m,1m,2m,3m:projected disantance

【 Using battery and irradiation continuity 】

Model	Battery				
	12V12ah	12V2ah	6V600mAh	7.2V2300mAh	7.2V inside
SL-24PEX	7.5h	1.2h	-	-	-
SL-MD9PEX	18.0h	3.0h	-	-	-
SL-6PEX-OB	-	-	-	-	4.5h
SL-MD3PEX	-	-	1.4h	5.5h	-

* SL-24PEX & SL-MD9PEX can be applied to adapter with AC100V

